


# Swegon **INSIDE**

Verbinden Sie WISE-Systeme mit der Swegon **INSIDE** Cloud, um unsere verbundenen Cloud-Dienste zu nutzen.

# Stellen Sie sicher, dass Sie SW 1.150.1 oder höher haben (empfohlene Mindestversion: 1.180)

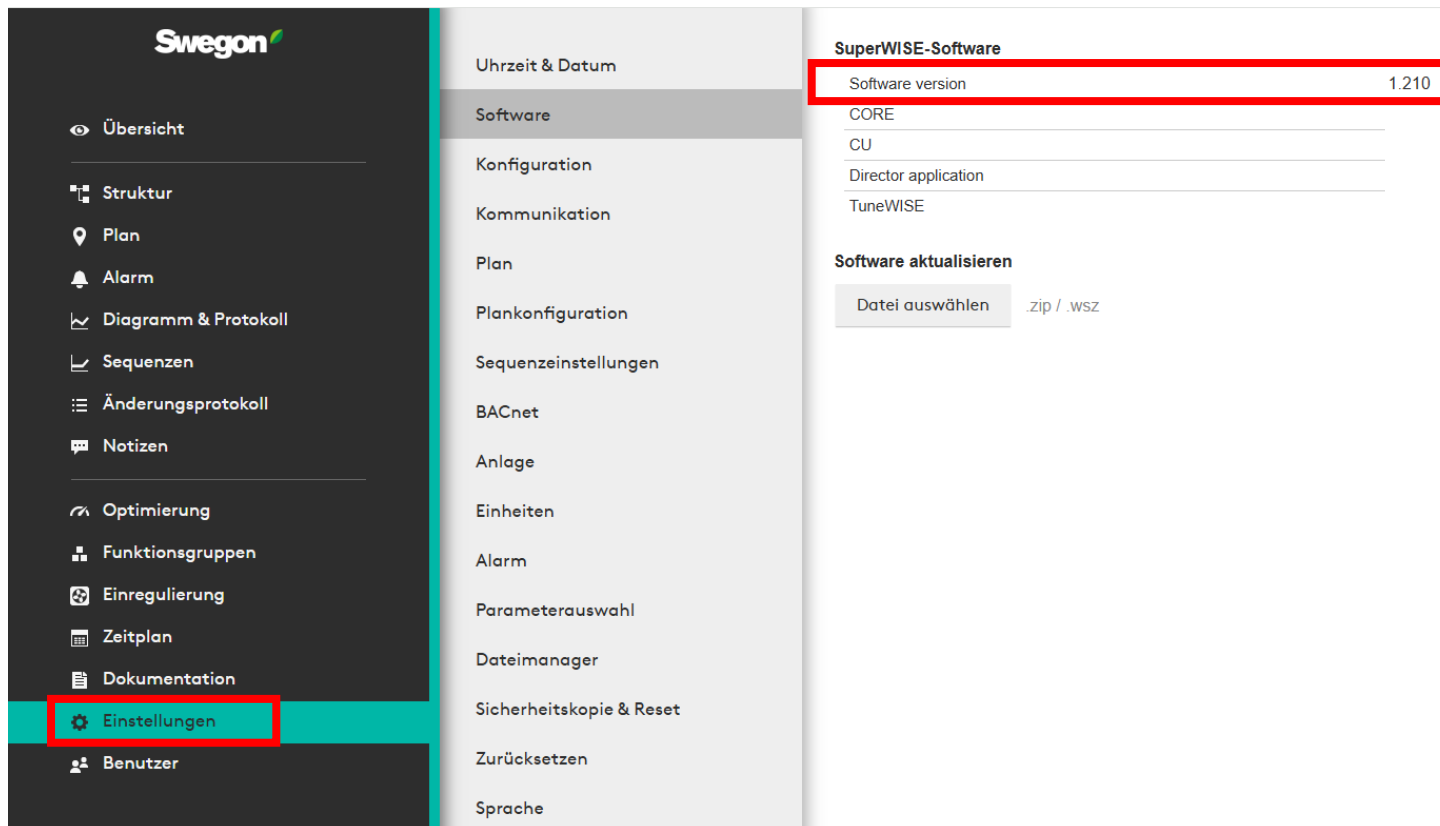

The screenshot displays the Swegon software interface. On the left, a dark sidebar contains a menu with the 'Einstellungen' (Settings) option highlighted with a red box. The main content area is divided into three sections: 'Uhrzeit & Datum', 'Software', and 'Konfiguration'. The 'Software' section is active, showing a table of software components. The 'SuperWISE-Software' section is highlighted with a red box, and the 'Software version' is listed as 1.210. Below this, there are sections for 'Software aktualisieren' (Update software) and 'Datei auswählen' (Select file).


SuperWISE-Software	
Software version	1.210
CORE	---
CU	---
Director application	---
TuneWISE	---

**Software aktualisieren**

Datei auswählen .zip / .wsz

# Ein Konto erstellen

- Besuchen Sie die [Swegon-Website](#)
  - Support & Software → Connected products
  - 1 Zugang zum INSIDE-Portal beantragen
  - 2 Füllen Sie das Formular aus und klicken Sie auf "Senden".
  - Warten Sie dann auf die E-Mail, die Sie zum INSIDE-Portal einlädt

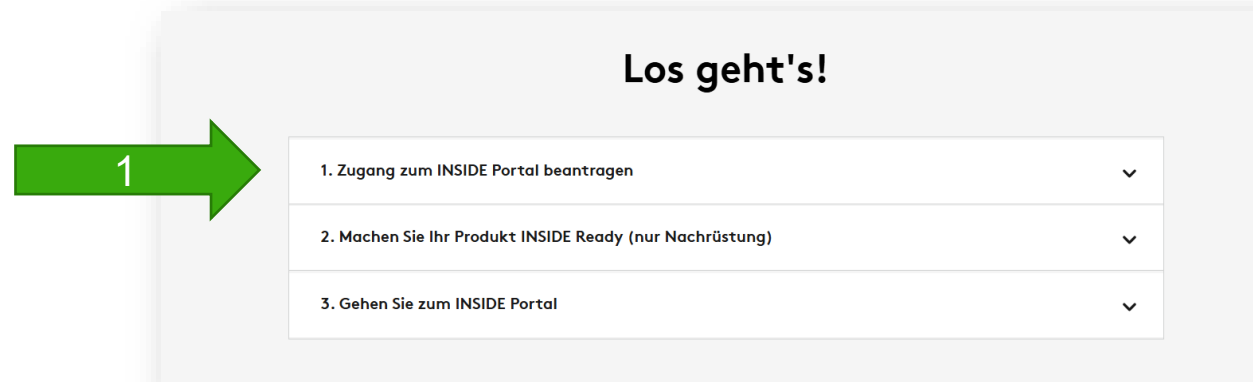

**Los geht's!**

1. Zugang zum INSIDE Portal beantragen

Geben Sie Ihre Daten ein, um ein Login anzufordern.

Wenn Sie bereits ein Konto haben, können Sie andere Benutzer in Ihrer Organisation oder Ihrem Gebäude auf das INSIDE Portal einladen. Wenn Sie Fragen haben, wenden Sie sich bitte an [digitalservices@swegon.com](mailto:digitalservices@swegon.com)

**Informationen zum Konto**

E-Mail (wird als Benutzername verwendet)\*

Vorname\*

Nachname\*

Firmenname\*

**Informationen zu Gebäuden und Produkten**

Produkt wählen\*

Seriennummer des Produkts\*

Name des Gebäudes\*

Anschrift des Gebäudes\*

Ort\*

Country\*

Swegon needs the contact information you provide to contact you about the requested service. You may unsubscribe from these communications at anytime. For information on how to unsubscribe, as well as our privacy practices and commitment to protecting your privacy, check out our [Privacy Policy](#).


geschützt durch reCAPTCHA  
Verhaltensanforderung Nutzungsbedingungen

**EINSENDEN**

# 1. Melden Sie sich im INSIDE Portal an.

## Swegon INSIDE Portal

- <https://inside.swegon.com>

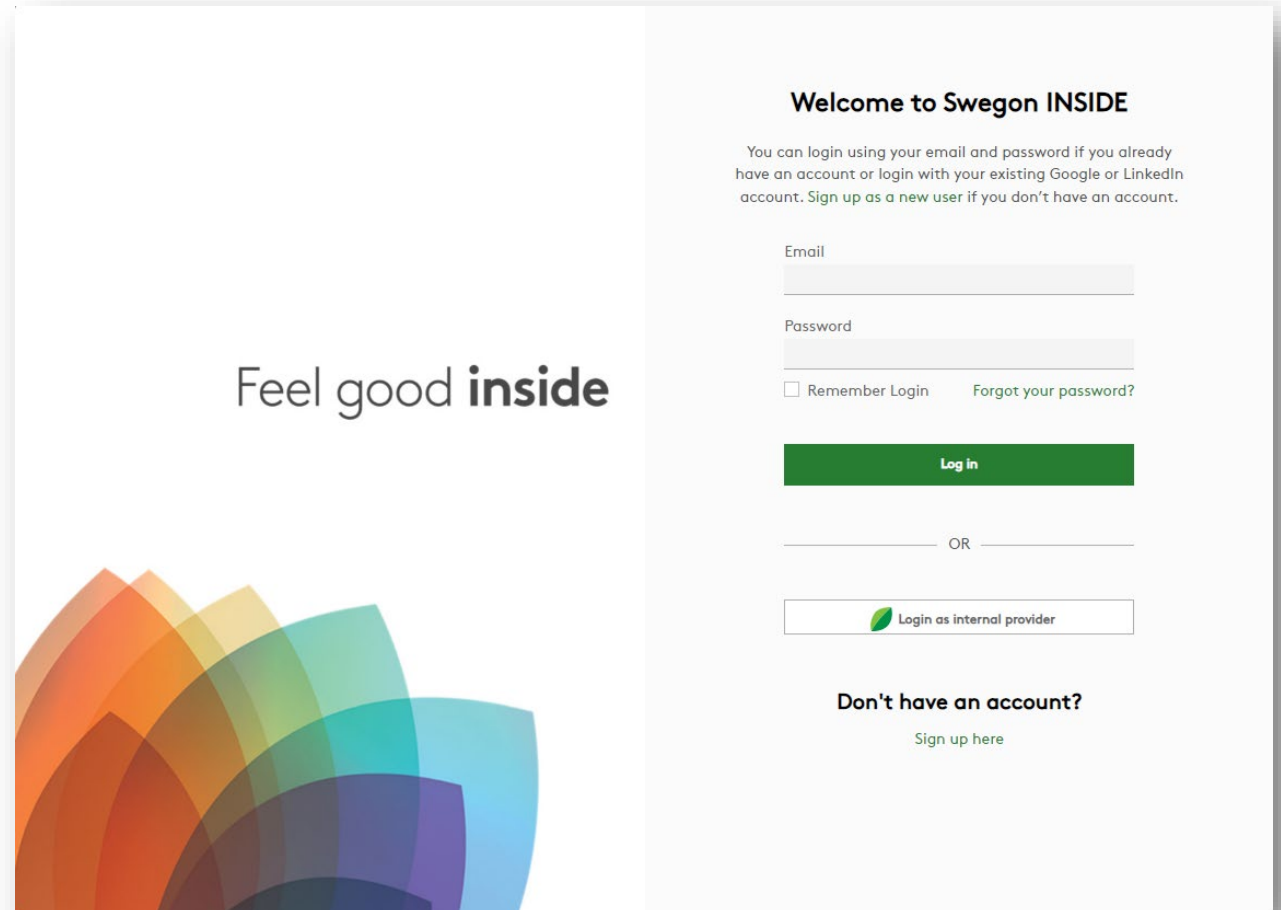

The screenshot shows the Swegon INSIDE Portal login interface. On the left, there is a decorative graphic of overlapping semi-circles in various colors (orange, yellow, green, blue, purple) and the text "Feel good **inside**". On the right, the login form is titled "Welcome to Swegon INSIDE". It includes a message: "You can login using your email and password if you already have an account or login with your existing Google or LinkedIn account. Sign up as a new user if you don't have an account." Below this are input fields for "Email" and "Password". There are checkboxes for "Remember Login" and a link for "Forgot your password?". A green "Log in" button is positioned below the form. Below the button, there is an "OR" separator and a button labeled "Login as internal provider" with a small green leaf icon. At the bottom, there is a section titled "Don't have an account?" with a link "Sign up here".

Feel good **inside**

**Welcome to Swegon INSIDE**


You can login using your email and password if you already have an account or login with your existing Google or LinkedIn account. Sign up as a new user if you don't have an account.

Email  
Password

Remember Login    [Forgot your password?](#)

**Log in**

OR

 Login as internal provider

**Don't have an account?**  
[Sign up here](#)

## 2. Gehen Sie auf die Seite "Gebäude".


The screenshot displays the Swegon user interface for an organization. The breadcrumb navigation at the top reads "Home > Organisations > Company Name". A "GO BACK" button is on the left, and an "EDIT ORGANISATION" button is on the right. The main heading is "Company Name".

The "Buildings" section is highlighted with a red circle. It contains a search bar labeled "Search for building name" with a magnifying glass icon. Below the search bar is a table with the following data:

Name	City	Country	Number of products	Role
Head Office	Stockholm	Sweden	0	Organisation Admin

The "Head Office" entry is also highlighted with a red circle. At the bottom of the table, it says "Rows per page: 100" and "1-1 of 1". Below the table are sections for "Organisation administrators" and "App users", both with expandable arrows. The bottom left corner shows a user profile icon with the initials "PA".

### 3. Klicken Sie auf "Produkt anfordern".

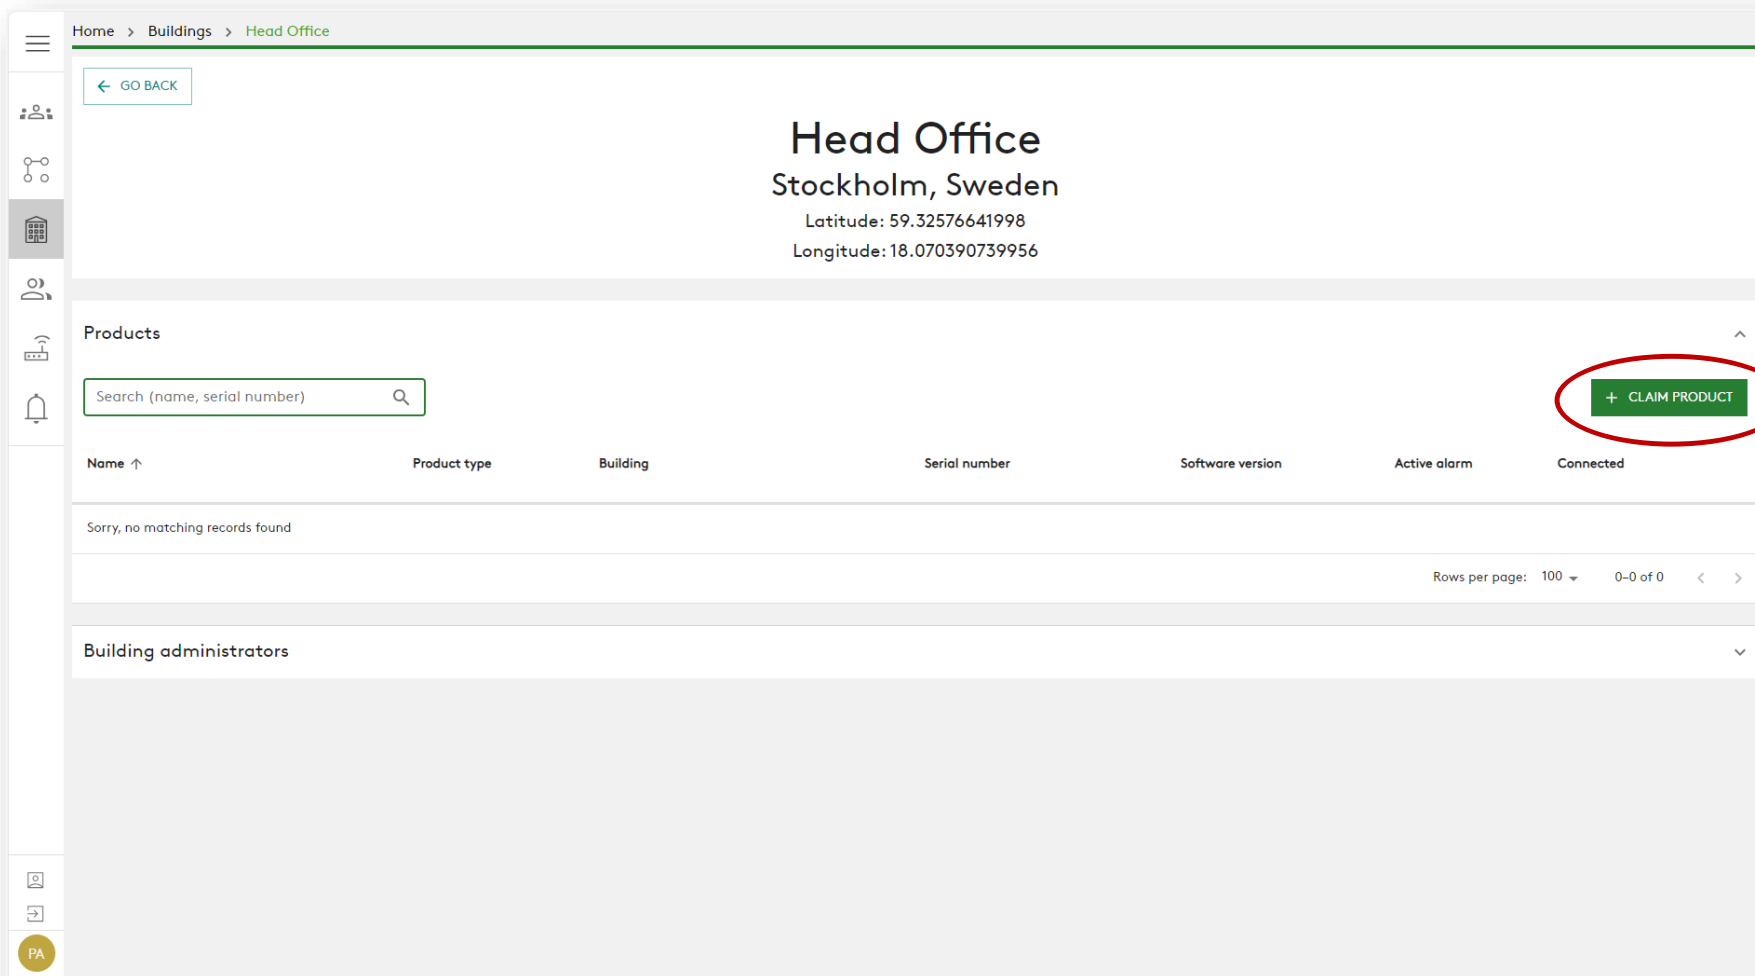

The screenshot shows a web interface for a building named 'Head Office' in Stockholm, Sweden. The breadcrumb navigation is 'Home > Buildings > Head Office'. A 'GO BACK' button is visible in the top left. The main heading is 'Head Office' with the location 'Stockholm, Sweden' and coordinates: Latitude: 59.32576641998, Longitude: 18.070390739956.

Below this, there is a 'Products' section with a search bar containing the text 'Search (name, serial number)'. To the right of the search bar is a green button labeled '+ CLAIM PRODUCT', which is circled in red. Below the search bar is a table with the following columns: Name ↑, Product type, Building, Serial number, Software version, Active alarm, and Connected. The table currently displays the message 'Sorry, no matching records found'. At the bottom right of the table area, it says 'Rows per page: 100' and '0-0 of 0'.

At the bottom of the page, there is a 'Building administrators' section which is currently empty. A sidebar on the left contains several icons, including a home icon, a person icon, a network icon, a building icon, a person icon, a Wi-Fi icon, and a bell icon. At the bottom left, there is a circular button labeled 'PA'.

4. Geben Sie die Seriennummer des Produkts ein und bestätigen Sie mit einem Klick außerhalb des Textfeldes. Wenn Sie außerhalb des Textfeldes klicken, können Sie auf dieselbe Weise weitere Seriennummern hinzufügen.

The screenshot displays the Swegon web interface for a building named 'Head Office' in Stockholm, Sweden. The interface includes a navigation menu on the left, a breadcrumb trail (Home > Buildings > Head Office), and a 'GO BACK' button. The main content area shows the building name, location, and coordinates. Below this, there is a 'Products' section with a search bar and a table. A modal dialog box titled 'Claim product(s)' is open, containing a text input field for the serial number and a 'SUBMIT' button. The dialog box also includes a 'CLAIM PRODUCT' button in the background. The table below the dialog box has columns for 'Name', 'Product type', 'Software version', 'Active alarm', and 'Connected'. The table is currently empty, showing 'Sorry, no matching records found'. The bottom of the page shows a 'Building administrators' section and a 'PA' button.

Home > Buildings > Head Office

← GO BACK

## Head Office

Stockholm, Sweden

Latitude: 59.32576641998  
Longitude: 18.070390739956

### Products

Search (name, serial number) 🔍

Name ↑	Product type	Software version	Active alarm	Connected
Sorry, no matching records found				

Rows per page: 100 ▾ 0-0 of 0 < >

### Building administrators

PA

#### Claim product(s)

Once you have activated INSIDE on your INSIDE Ready product, you can claim the product to connect it to your building and start benefiting from our digital services.

The serial number can be found on the product's internal website under the 'Communication' tab

✓ SUBMIT

+ CLAIM PRODUCT

5 Bevor Sie auf Absenden klicken, müssen Sie Ihre Geräte benennen. Klicken Sie dann auf Absenden.

Wenn das Produkt bereits mit INSIDE Cloud verbunden ist, müssen Sie die MAC-Adresse des Produkts eingeben, um es zu beanspruchen.

The screenshot shows the Swegon INSIDE Cloud interface for a building named 'Head Office' in 'Stockholm, Sweden'. A modal dialog box titled 'Claim product(s)' is open, providing instructions on how to claim a product. The dialog includes a search bar for serial numbers, which currently contains two entries: '1111111111' and '1122112211'. Below the search bar, there is a message stating that the serial number can be found on the product's internal website under the 'Communication' tab. The dialog also prompts the user to name the product(s) and provides two input fields for the names, one for each serial number. The first input field is highlighted with a red circle. A 'SUBMIT' button is located at the bottom of the dialog. In the background, the main interface shows a table with columns for 'Name', 'Product type', 'Software version', 'Active alarm', and 'Connected'. A '+ CLAIM PRODUCT' button is visible in the top right corner of the main interface.

Home > Buildings > Head Office

Head Office  
Stockholm, Sweden

Claim product(s)

Once you have activated INSIDE on your INSIDE Ready product, you can claim the product to connect it to your building and start benefiting from our digital services.

Serial number(s)

1111111111 1122112211

The serial number can be found on the product's internal website under the 'Communication' tab

Name

The following product(s) needs a name to be able to be added to the building.

1111111111 GOLD name \*

1122112211 GOLD name \*

SUBMIT

GO BACK

Products

Search (name, serial number)

Name ↑ Product type Bu

Sorry, no matching records found

Building administrators

Software version Active alarm Connected

+ CLAIM PRODUCT

Rows per page: 100 0-0 of 0



## 6. Jetzt haben Sie Ihre Produkte erfolgreich eingerichtet.

Home > Buildings > Head Office

← GO BACK

### Head Office

Stockholm, Sweden

Latitude: 59.32576641998  
Longitude: 18.070390739956

#### Products

Search (name, serial number)

Name ↑	Product type	Building	Serial number	Software version	Active alarm	Connected
GOLD1	GOLD	Head Office	111111111			●
GOLD2	GOLD	Head Office	112211221			●

Rows per page: 100 ▾ 1-2 of 2 < >

#### Building administrators

PA

7. Wenn Ihre Produkte nicht verbunden sind (wie unten gezeigt), überprüfen Sie, ob Swegon INSIDE auf dem Produkt aktiviert ist und ob es ein gültiges Zertifikat hat (INSIDE Ready).

Home > Buildings > Head Office

← GO BACK

## Head Office

Stockholm, Sweden  
 Latitude: 59.32576641998  
 Longitude: 18.070390739956

Products +

Search (name, serial number)

[+ CLAIM PRODUCT](#)

Name ↑	Product type	Building	Serial number	Software version	Active alarm	Connected
GOLD1	GOLD	Head Office	111111111			●
GOLD2	GOLD	Head Office	112211221			●

Rows per page: 100 ▾ 1-2 of 2 < >

Building administrators ▼

PA



**Wenn Ihr Produkt kein gültiges Zertifikat hat:**  
Hier erfahren Sie, wie Sie Ihr Produkt INSIDE Ready  
machen können (Nachrüstung)

1. Gehen Sie zu Ihrem Gebäude und klicken Sie auf das Produkt, das Sie INSIDE Ready machen wollen.

Home > Buildings > Head Office

← GO BACK

## Head Office

Stockholm, Sweden  
Latitude: 59.32576641998  
Longitude: 18.070390739956

### Products

Search (name, serial number)

[+ CLAIM PRODUCT](#)


Name ↑	Product type	Building	Serial number	Software version	Active alarm	Connected
Test wise	SuperWISE	Head Office	111111111			●
GOLD2	GOLD	Head Office	112211221			●

Rows per page: 100 ▾ 1-2 of 2 < >


### Building administrators

PA

2. Drücken Sie die Taste "MAKE INSIDE READY".

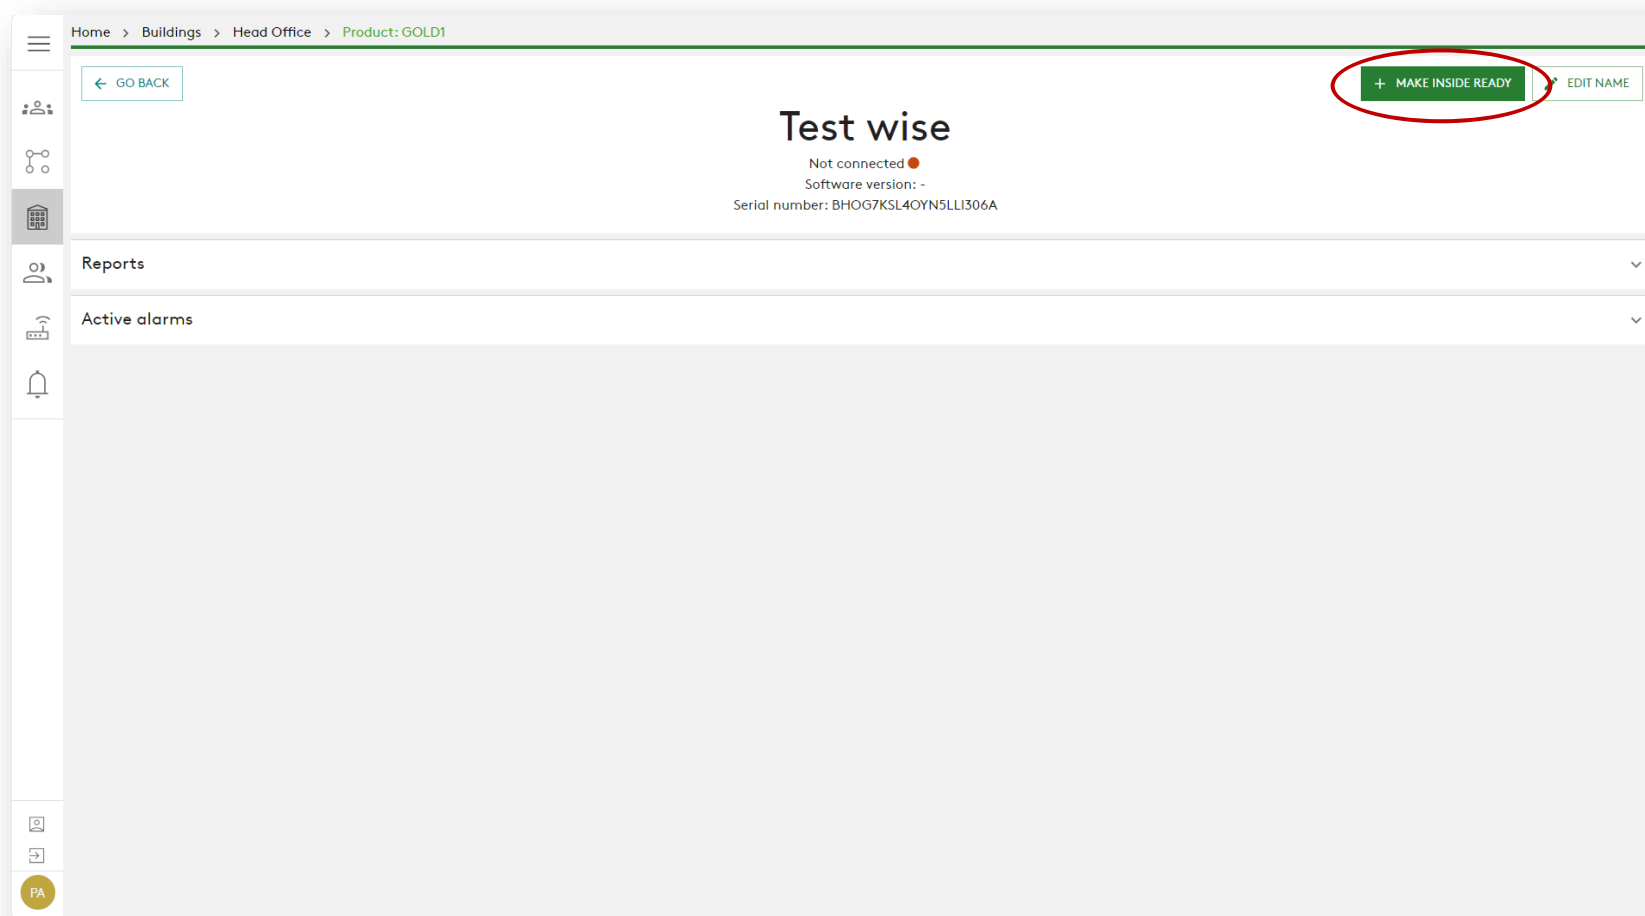


3a. Geben Sie die MAC-Adresse des Produkts ein und drücken Sie auf "Senden".

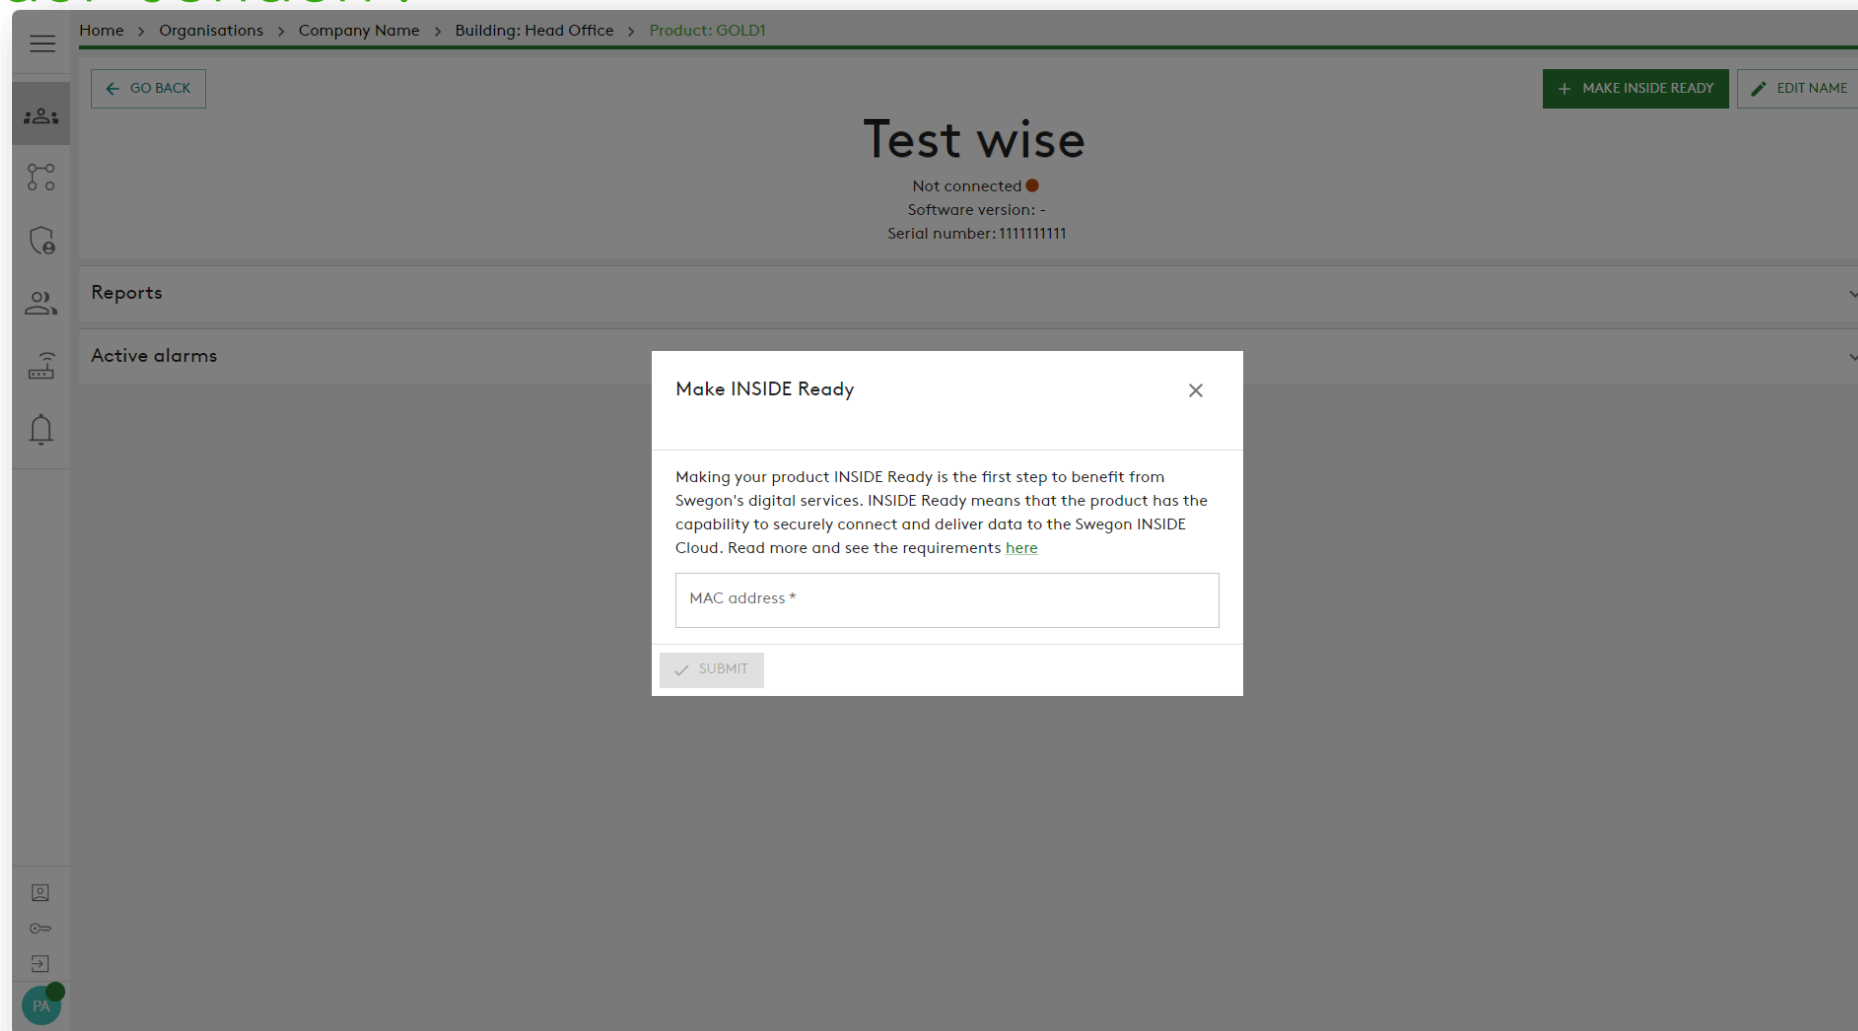

The screenshot shows a web application interface for a device named "Test wise". The breadcrumb navigation at the top reads: Home > Organisations > Company Name > Building: Head Office > Product: GOLD1. In the top right corner, there are two buttons: "+ MAKE INSIDE READY" and "EDIT NAME". The main content area displays the device name "Test wise" and its status: "Not connected" (with a red dot), "Software version: -", and "Serial number: 111111111". Below this, there are sections for "Reports" and "Active alarms", both with expandable arrows. A modal dialog box titled "Make INSIDE Ready" is open in the center. It contains the following text: "Making your product INSIDE Ready is the first step to benefit from Swegon's digital services. INSIDE Ready means that the product has the capability to securely connect and deliver data to the Swegon INSIDE Cloud. Read more and see the requirements [here](#)". Below the text is a text input field labeled "MAC address \*". At the bottom of the dialog is a "SUBMIT" button with a checkmark icon. On the left side of the interface, there is a vertical sidebar with several icons, including a bell icon for notifications and a "PA" button at the bottom.

## 3b. Kopieren Sie die ID und den Aktivierungscode.

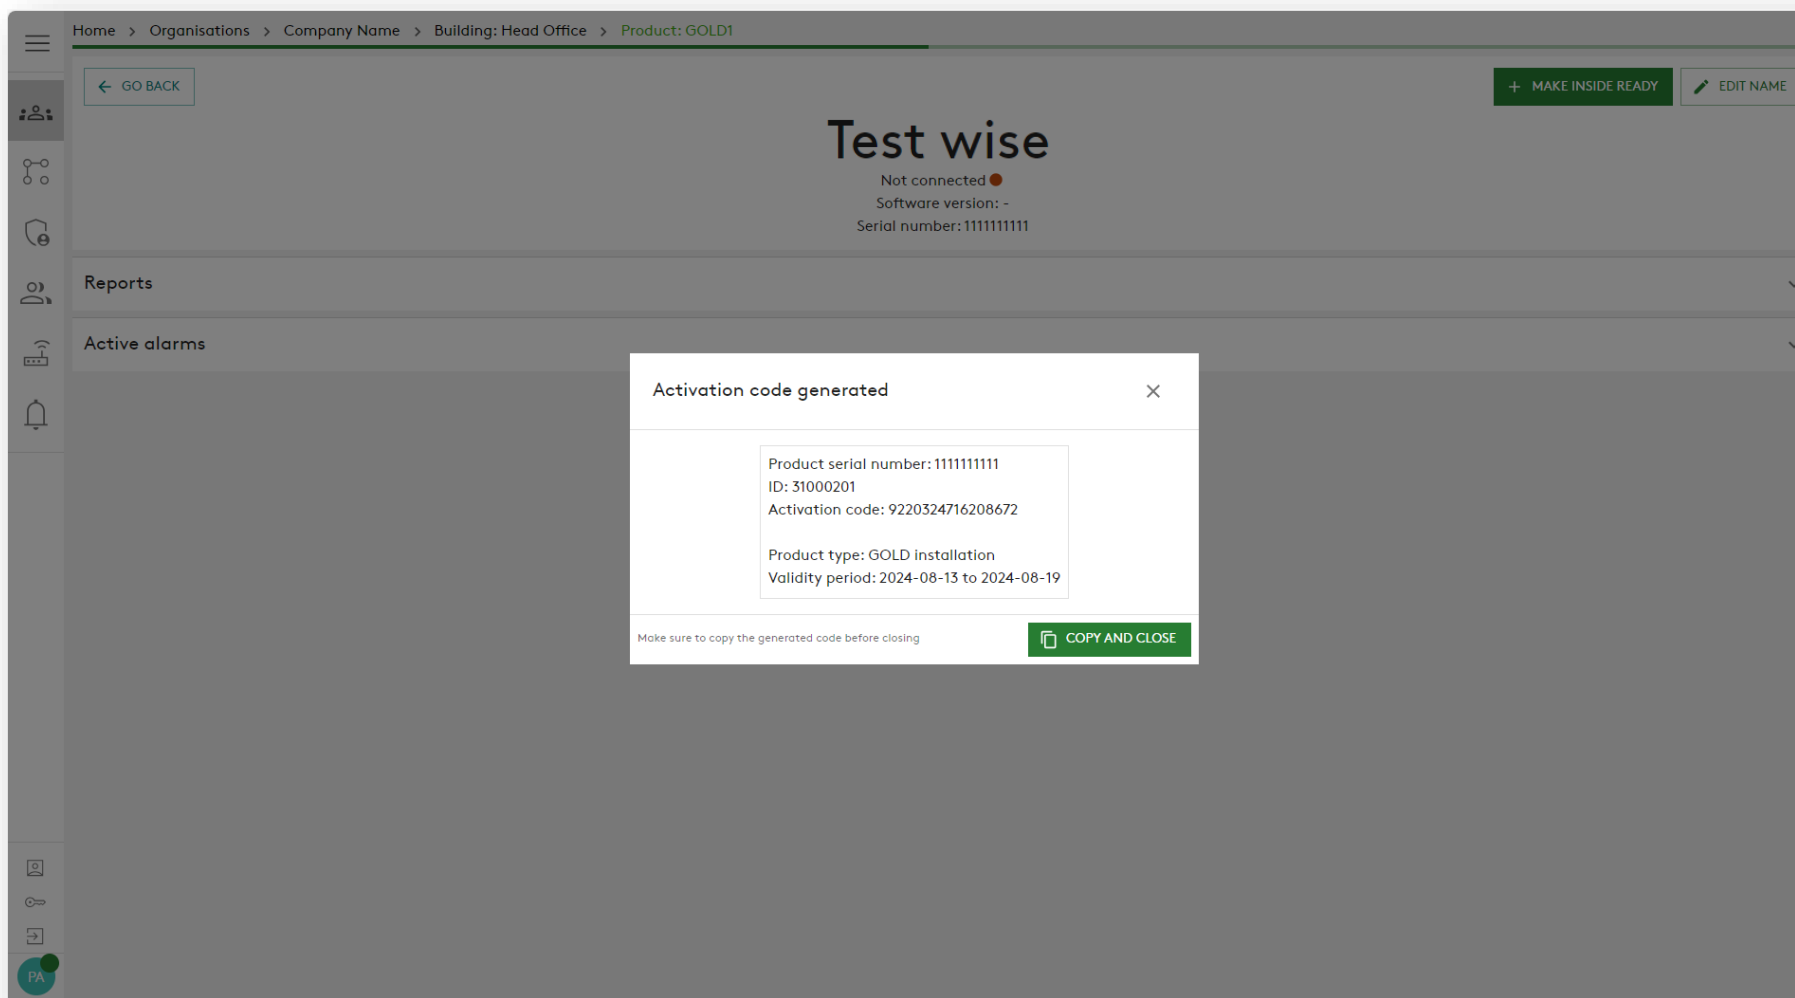

The screenshot shows a web interface for a Swegon device. The breadcrumb navigation at the top reads: Home > Organisations > Company Name > Building: Head Office > Product: GOLD1. The main heading is "Test wise". Below it, the status is "Not connected" with a red dot, and the software version is "-". The serial number is "111111111".

There are two sections: "Reports" and "Active alarms", both with dropdown arrows. A modal window titled "Activation code generated" is open in the center. It contains the following information:

- Product serial number: 1111111111
- ID: 31000201
- Activation code: 9220324716208672
- Product type: GOLD installation
- Validity period: 2024-08-13 to 2024-08-19

At the bottom of the modal, there is a note: "Make sure to copy the generated code before closing" and a green button labeled "COPY AND CLOSE".

## 3c. Melden Sie sich bei Ihrem SuperWISE an und gehen Sie zu "Kommunikation".

The screenshot shows the Swegon SuperWISE web interface. The left sidebar contains navigation options. The main content area is divided into sections: 'Netzwerk', 'Swegon INSIDE', and 'Swegon INSIDE-Zertifikat'. The 'Netzwerk' section includes 'LAN-Ports' with 'Port 4: Betriebsnetz' and 'Port 3: Service'. The 'Swegon INSIDE' section has a toggle switch for 'Swegon INSIDE' which is highlighted with a red box. The 'Standard gateway' field in the 'Port 4: Betriebsnetz' section is also highlighted with a red box.

1. Vergewissern Sie sich, dass DNS ausgefüllt ist.
2. Geben Sie die Zertifikats-ID und den Aktivierungscode ein. Klicken Sie auf "Aktivieren".
3. SuperWISE neu starten
4. Aktivieren Sie Swegon INSIDE.



4. Wenn die Produkte verbunden sind und Daten mit INSIDE Cloud austauschen, leuchten die Punkte grün.

Home > Buildings > Head Office

← GO BACK

## Head Office

Stockholm, Sweden  
Latitude: 59.32576641998  
Longitude: 18.070390739956

### Products

Search (name, serial number)

+ CLAIM PRODUCT

Name ↑	Product type	Building	Serial number	Software version	Active alarm	Connected
GOLD1	GOLD	Head Office	111111111			●
GOLD2	GOLD	Head Office	112211221			●

Rows per page: 100 1-2 of 2


### Building administrators



# INSIDE Portal

INSIDE Portal ist die Plattform für alle angeschlossenen Swegon-Produkte und die Drehscheibe für die digitalen Dienstleistungen von Swegon

# INSIDE-Portal

Ausgangspunkt für angeschlossene Swegon-Produkte

- Unentgeltlich
- Überblick über die wichtigsten Parameter
  - System-Übersicht
  - Maximale und minimale Temperatur
  - Status des Heizungs-/Kühlungsbedarfs
  - Belegungsgrad
  - Aktive Alarme
- Nutzer zur INSIDE App einladen 

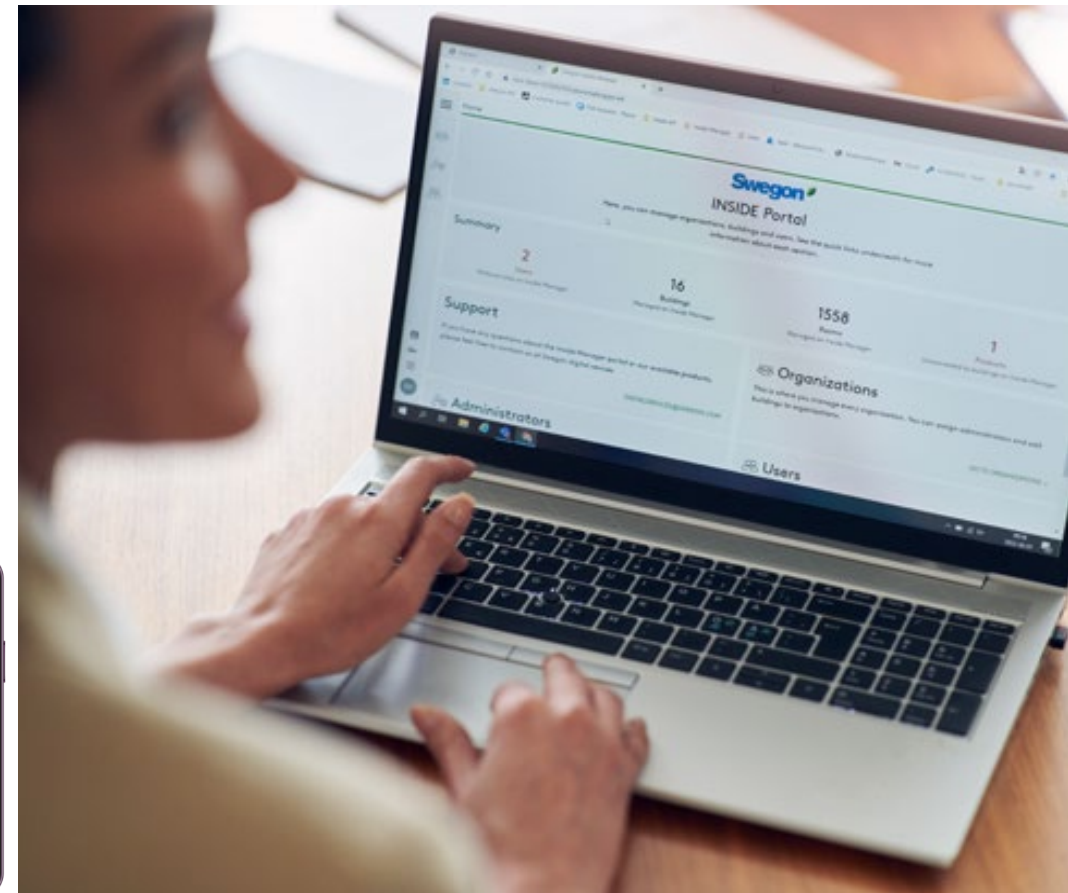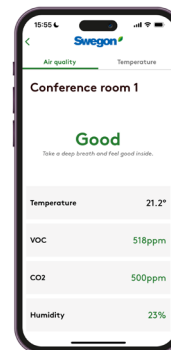

# INSIDE Portal - Alarm-Benachrichtigungen per E-Mail

Erhalten Sie Alarmbenachrichtigungen von angeschlossenen Geräten an Ihre E-Mail

Home > Alarm subscriptions

My alarm subscriptions

Search for any keyword

DELETE SELECTED EDIT SELECTED + ADD ALARM SUBSCRIPTION

<input type="checkbox"/>	Product name	Notify at (severity)	Building name	City	Country	Product type	Organisation
<input type="checkbox"/>	Kv Målet 1, Umeå	A B	Swegon Umeå	Umeå	Sweden	SuperWISE	Swegon
<input type="checkbox"/>	Åbyhøj GOLD	A B	Swegon Åbyhøj	Åbyhøj	Denmark	GOLD	Swegon Denmark
<input type="checkbox"/>	Zeta Sky Hi R7 (R32)	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
<input type="checkbox"/>	Titan Sky Hi R0 HP	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
<input type="checkbox"/>	GEYSER Sky R0 (R290)	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
<input type="checkbox"/>	Epsilon Sky Hi	A	Swegon Cantarana	Cantarana	Italy	BlueBox Epsilon SKY	Swegon
<input type="checkbox"/>	Boställsvägen 1 Örebro	A B I	Swegon Örebro	Örebro	Sweden	SuperWISE	Swegon
<input type="checkbox"/>	SWEGON BUREAU	A B I	Swegon France Lyon	Lyon	France	SuperWISE	Swegon
<input type="checkbox"/>	Zeta Rev	A	Swegon Cantarana	Cantarana	Italy	BlueBox Chiller/Heatpump	Swegon
<input type="checkbox"/>	TA/FA 73	A B I	Swegon Kvånum	Kvånum	Sweden	GOLD	Swegon
<input type="checkbox"/>	OPEN SPACE	A	Swegon Cantarana	Cantarana	Italy	GOLD	Swegon

PA

# INSIDE Portal - Warnmeldungen per E-Mail

Wählen Sie aus, über welche Warnmeldungen Sie per E-Mail informiert werden möchten

Home > Alarm subscriptions

My alarm subscriptions ○

Search for any keyword

Product name Notify at (severity)

Zeta Sky Hi R7 (R32) A

Titan Sky Hi R0 HP A

GEYSER Sky R0 (R290) A

Epsilon Sky Hi A

Zeta Rev A

OPEN SPACE A

**Add alarm subscriptions**

Product name	Notify at (severity)	Building name	City	Country	Product type	Organisation
	A <input type="checkbox"/> B <input type="checkbox"/> T <input type="checkbox"/>					
Boställsvägen 1 Örebro	A <input type="checkbox"/> B <input type="checkbox"/> T <input type="checkbox"/>	Swegon Örebro	Örebro	Sweden	SuperWISE	Swegon
SWEGON BUREAU	A <input type="checkbox"/> B <input type="checkbox"/> T <input type="checkbox"/>	Swegon France Lyon	Lyon	France	SuperWISE	Swegon
TA/FA 73	A <input type="checkbox"/> B <input type="checkbox"/> T <input type="checkbox"/>	Swegon Kvänum	Kvänum	Sweden	GOLD	Swegon
Äbyhøj GOLD	A <input type="checkbox"/> B <input type="checkbox"/> T <input type="checkbox"/>	Swegon Äbyhøj	Äbyhøj	Denmark	GOLD	Swegon Denmark
Kv Målet 1, Umeå	A <input type="checkbox"/> B <input type="checkbox"/> T <input type="checkbox"/>	Swegon Umeå	Umeå	Sweden	SuperWISE	Swegon
TA 12	A <input type="checkbox"/> B <input type="checkbox"/> T <input type="checkbox"/>	Swegon Gothenburg	Gothenburg	Sweden	GOLD	Swegon
GOLD 2005646491	A <input type="checkbox"/> B <input type="checkbox"/> T <input type="checkbox"/>	Swegon Sundsvall	Sundsvall	Sweden	GOLD	Swegon
Swegon - Brandby	A <input type="checkbox"/> B <input type="checkbox"/> T <input type="checkbox"/>	Swegon Brandby	Brandby	Denmark	SuperWISE	Swegon Denmark
Swegon Malmö	A <input type="checkbox"/> B <input type="checkbox"/> T <input type="checkbox"/>	Swegon Malmö	Malmö	Sweden	SuperWISE	Swegon
Swegon Goteborg	A <input type="checkbox"/> B <input type="checkbox"/> T <input type="checkbox"/>	Swegon Gothenburg	Gothenburg	Sweden	SuperWISE	Swegon
LB03 Luleå	A <input type="checkbox"/> B <input type="checkbox"/> T <input type="checkbox"/>	Swegon Luleå	Luleå	Sweden	GOLD	Swegon
GOLD Umeå	A <input type="checkbox"/> B <input type="checkbox"/> T <input type="checkbox"/>	Swegon Umeå	Umeå	Sweden	GOLD	Swegon
Norrkøping kontor	A <input type="checkbox"/> B <input type="checkbox"/> T <input type="checkbox"/>	Swegon Norrkøping	Norrkøping	Sweden	SuperWISE	Swegon

EDIT SELECTED + ADD ALARM SUBSCRIPTION

SUBMIT

# INSIDE Portal: Übersicht der angeschlossenen Geräte

Home > Buildings

Buildings

Search for building name

Name	City	Country	Number of products	Role
Swegon Åbyhøj	Åbyhøj	Denmark	1	Organisation Admin
Swegon Borås	Borås	Sweden	2	Organisation Admin
Swegon Brøndby	Brøndby	Denmark	2	Organisation Admin
Swegon Cantarana	Cantarana	Italy	6	Organisation Admin
Swegon France Lyon	Lyon	France	2	Organisation Admin
Swegon Gembloux	Gembloux	Belgium	1	Organisation Admin
Swegon Gothenburg	Gothenburg	Sweden	4	Organisation Admin
Swegon Kvänum	Kvänum	Sweden	4	Organisation Admin
Swegon Kvänum Testcenter	Kvänum	Sweden	2	Organisation Admin
Swegon Luleå	Luleå	Sweden	2	Organisation Admin
Swegon Malmö	Malmö	Sweden	1	Organisation Admin
Swegon Norrköping	Norrköping	Sweden	1	Organisation Admin
Swegon Örebro	Örebro	Sweden	1	Organisation Admin
Swegon Stockholm	Stockholm	Sweden	1	Organisation Admin
Swegon Sundsvall	Sundsvall	Sweden	1	Organisation Admin
Swegon Tomelilla	Tomelilla	Sweden	1	Organisation Admin
Swegon Umeå	Umeå	Sweden	2	Organisation Admin

Rows per page: 100 1-17 of 17

Vollständige Übersicht über alle Gebäude in Ihrer Organisation

- Name des Gebäudes
- Standort des Gebäudes
- Anzahl der Produkte

# INSIDE Portal: Übersicht der angeschlossenen Geräte

Home > Buildings > Swegon Cantarana

← GO BACK

## Swegon Cantarana

Cantarana, Italy  
 Latitude: 45.1993380911563  
 Longitude: 12.094361755745242

Products

Search (name, serial number) 🔍

+ CLAIM PRODUCT

Name ↑	Product type ▼	Building	Serial number	Software version	Active alarm	Connected
Epsilon Sky Hi	BlueBox Epsilon SKY	Swegon Cantarana	SB1*****	61.1.3		
GEYSER Sky R0 (R290)	BlueBox Chiller/Heatpump	Swegon Cantarana	SB1*****	701.138.129.4		
OPEN SPACE	GOLD	Swegon Cantarana	20057*****	2.43		
Titan Sky Hi R0 HP	BlueBox Chiller/Heatpump	Swegon Cantarana	SB1*****	701.140.130.9		
Zeta Rev	BlueBox Chiller/Heatpump	Swegon Cantarana	SB1*****	701.140.130.9		
Zeta Sky Hi R7 (R32)	BlueBox Chiller/Heatpump	Swegon Cantarana	SB1*****			

Rows per page: 100 ▼ 1-6 of 6 < >

Building administrators ▼

Active alarms ▼

PA


Vollständige Übersicht über die Swegon-Produkte in jedem Gebäude

- Standort
- Software-Version
- Aktive Alarmer
- Status der Konnektivität

# INSIDE Portal


Melden Sie sich hier beim INSIDE Portal an:

<https://inside.swegon.com/>

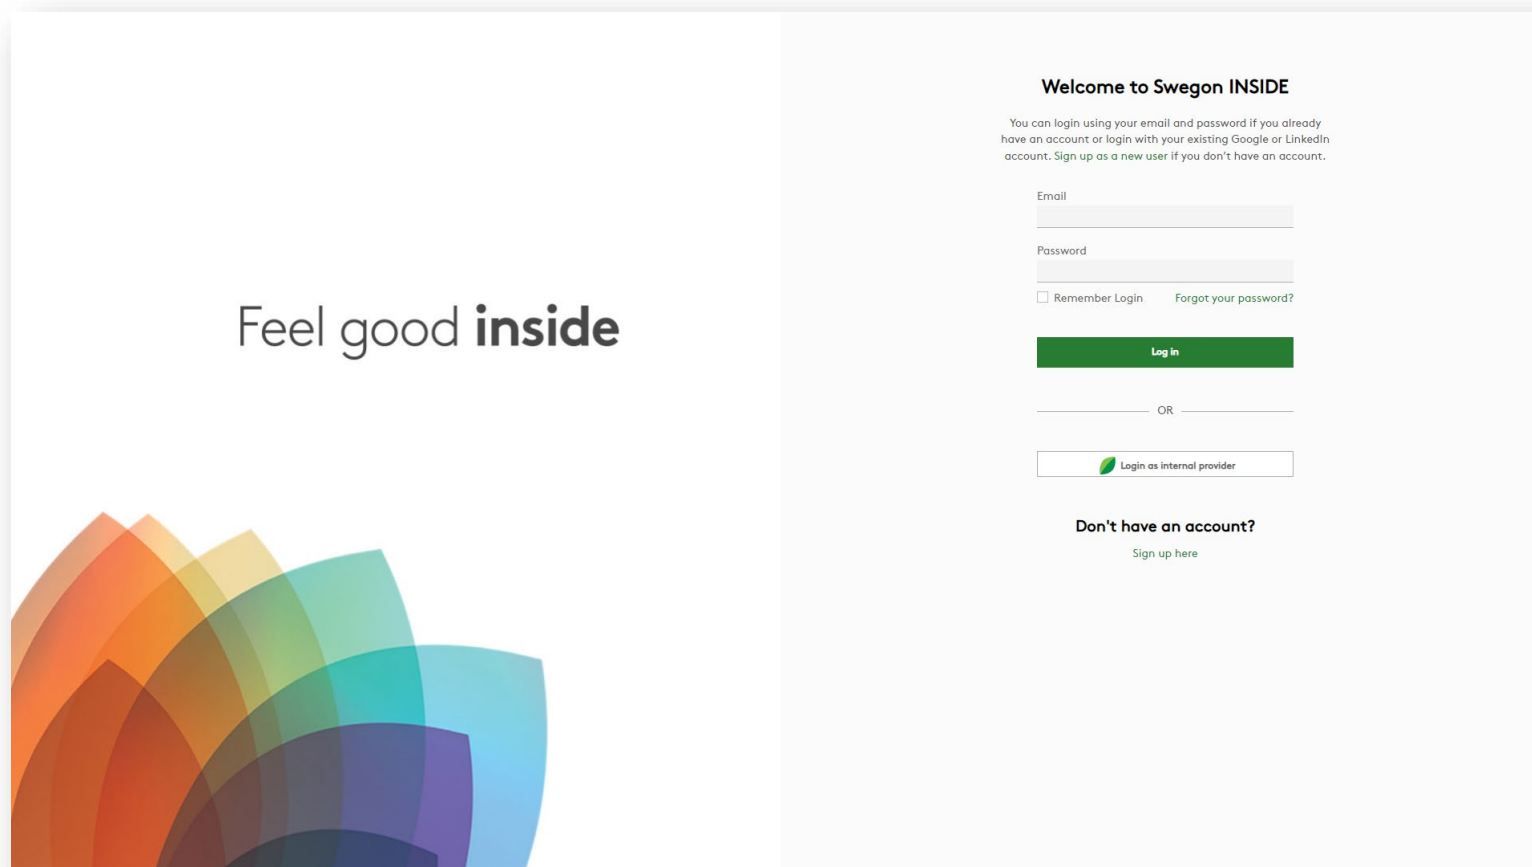



# Digitale Dienste

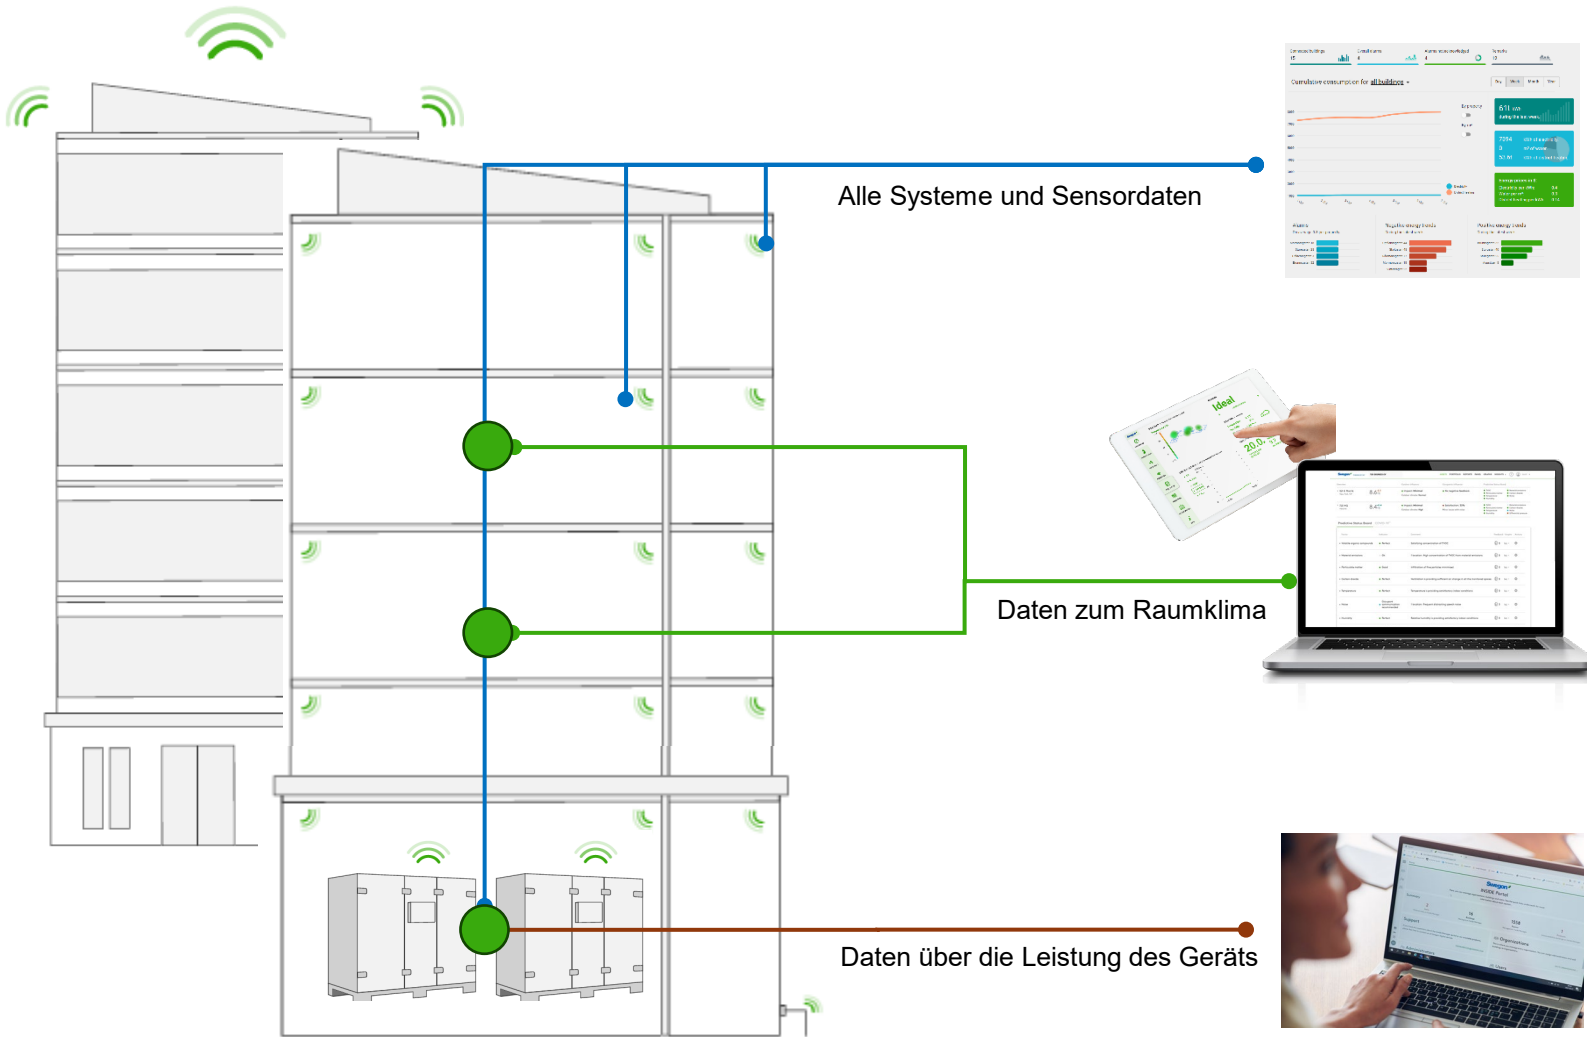

## INSIDE Director

Kombination von BMS- und EMS-Funktionen für einen kompletten Gebäudebestand.




## INSIDE Analytics & Visualiser

Analyse und Visualisierung des Raumklimas.



## INSIDE Portal

Fernüberwachung der wichtigsten Parameter des Geräts, aktiver Alarme und des Energieverbrauchs.



**Swegon** 





Feel good **inside**